




BlackGuard PVC Coated Threaded 3-Piece Coupling

BlackGuard PVC coated threaded 3-piece coupling join two conduit runs when neither can rotate. They are available in both malleable iron or copper-free aluminum.

Features

- Exterior dark grey PVC coating with a minimum thickness of 40 mil
- Interior Urethane coating with a minimum thickness of 2 mil
- Sizes available are 1/2" through 4"
- Sealing sleeves on all hubs

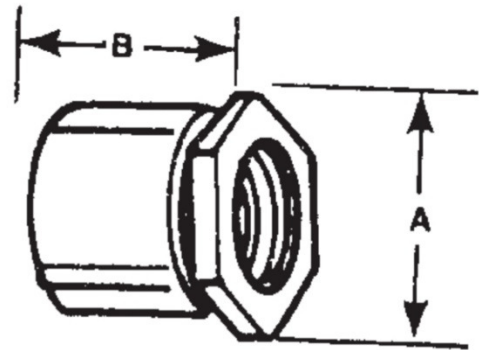

GRC PART NUMBER	SIZE	METRIC	Metal	DIMENSION A IN.	DIMENSION B IN.	ALUMINUM PART NUMBER
PF-3PC-050	1/2"	16	1.5	1.47	1.25	PFA-3PC-050
PF-3PC-075	3/4"	21	1.532	1.56	1.41	PFA-3PC-075
PF-3PC-100	1"	27	1.906	1.91	1.63	PFA-3PC-100
PF-3PC-125	1-1/4"	35	1.906	2.38	1.81	PFA-3PC-125
PF-3PC-150	1-1/2"	41	1.906	2.63	1.97	PFA-3PC-150
PF-3PC-200	2"	53	1.937	3.22	2.22	PFA-3PC-200
PF-3PC-250	2-1/2"	63	2.878	3.97	2.69	PFA-3PC-250
PF-3PC-300	3"	78	3.031	4.44	2.91	PFA-3PC-300
PF-3PC-350	3-1/2"	91	3.094	5.00	3.00	PFA-3PC-350
PF-3PC-400	4"	103	3.188	5.50	3.19	PFA-3PC-400