




BlackGuard PVC Coated Sealing Fittings – EYD Male-Female Hubs w/Drain

BlackGuard PVC coated Sealing Fittings used in hazardous locations to prevent flame and gas from continuing to travel through the conduit system. PVC coating provides corrosion protection. A sealing compound should be used on the interior after wiring. Compound supplied by the original fitting manufacturer.

Features

- Exterior dark grey PVC coating with a minimum thickness of 40 mil
- Interior Urethane coating with a minimum thickness of 2 mil
- Sizes available are 1/2" through 4"
- The length of the sleeve extension(s) shall be at least equivalent to the nominal conduit size for sizes 1/2" - 2". For sizes 2-1/2" - 6", the length of the sleeve extension(s) shall be at least 2".
- Sealing sleeve provided on plug hub (patching compound on top of plug)
- Mating sealing forms provided on all caps
- Sealing sleeves on all conduit openings

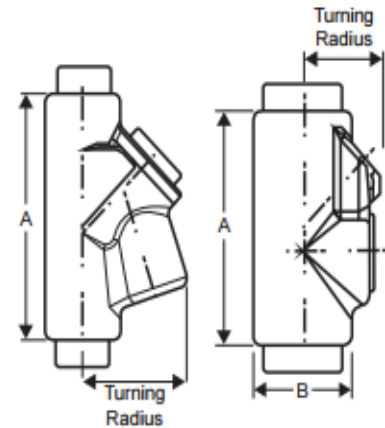

PART NUMBER	SIZE	A	B	WEIGHT PER 100	ALUMINUM PART NUMBER
PF-EYD-05016	1/2"	4.28	1.58	270	PFA-EYD-05016
PF-EYD-07526	3/4"	5.19	1.83	280	PFA-EYD-07526
PF-EYD-10036	1"	6.31	2.27	290	PFA-EYD-10036
PF-EYD-12546	1-1/4"	7.56	2.27	260	PFA-EYD-12546
PF-EYD-15056	1-1/2"	8.50	2.52	370	PFA-EYD-15056
PF-EYD-20066	2"	10.25	3.08	520	PFA-EYD-20066
PF-EYD-25076	2-1/2"	11.50	3.58	950	PFA-EYD-25076
PF-EYD-30086	3"	12.50	4.33	1130	PFA-EYD-30086
PF-EYD-35096	3-1/2"	13.19	4.83	1250	PFA-EYD-35096
PF-EYD-400106	4"	13.75	5.33	1670	PFA-EYD-400106