



## BlackGuard PVC Coated Mark 9 LB Fittings

**BlackGuard** offers a complete line of Mark 9 PVC coated aluminum conduit bodies. All fittings supplied with PVC coated aluminum covers. The sleeved threaded ends offer complete protection against corrosion while maintaining full ground continuity throughout the installed system.


### Features

- Exterior dark grey PVC coating with a minimum thickness of 40 mil
- Interior Urethane coating with a minimum thickness of 2 mil
- Specialized corrosion resistant coating provided on threads
- Sizes available are 1/2" to 4"
- Fittings supplied with plastic encapsulated stainless steel screws
- Sealing sleeves extender 1 pipe diameter or 2 inches, whichever is greater, beyond all female openings.



### Specifications

- UL Standard 514B
- CSA Standard: C22.2 No. 18

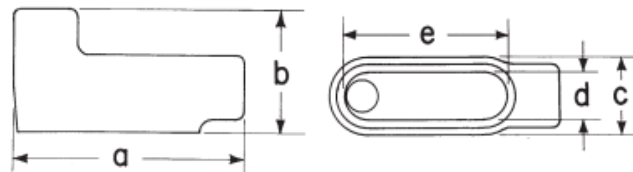

PART NUMBER	SIZE	METRIC	A	B	C	D	E
PVC-FIT-LB0509	1/2"	16	5.48	2.26	1.42	1.00	3.31
PVC-FIT-LB0759	3/4"	21	6.35	2.48	1.60	1.19	3.94
PVC-FIT-LB1009	1"	27	7.51	2.85	1.79	1.38	4.56
PVC-FIT-LB1259	1-1/4"	35	8.82	3.38	2.23	1.75	5.31
PVC-FIT-LB1509	1-1/2"	41	10.67	4.07	2.79	2.13	6.50
PVC-FIT-LB2009	2"	53	13.04	4.85	3.79	3.00	8.56
PVC-FIT-LB2509	2-1/2"	63	15.98	6.17	5.04	4.25	10.88
PVC-FIT-LB3009	3"	78	15.98	6.54	5.04	4.25	10.88
PVC-FIT-LB3509	3-1/2"	91	14.73	7.60	6.29	5.44	13.44
PVC-FIT-LB4009	4"	103	14.73	7.85	6.29	5.44	13.44

