




BlackGuard PVC Coated LBY Service Entrance Elbows

BlackGuard PVC coated LBY type fittings provided with PVC coating sleeves and a sealing form for the cover. LBY fittings are used for installation in hazardous locations.


Features

- Exterior dark grey PVC coating with a minimum thickness of 40 mil
- Interior Urethane coating with a minimum thickness of 2 mil
- Sizes available are 1/2" through 1-1/2"
- Sealing sleeves on all conduit openings
- PVC Seal between fitting and cover



Specifications

- National Electric Code/CEC Class I, Division 1 & 2, Groups C, D Class II, Division 1, Groups E, F, G
- Class II, Division 2, Groups F, G Class III
- UL Standard 886 Series LBY-50-GS through LBY-150-GS
- UL Standard 886
- CSA Standard: C22.2 No.18

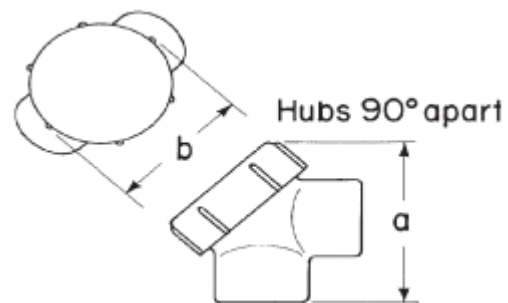

PART NUMBER	SIZE	A	B	WEIGHT PER 100	ALUMINUM PART NUMBER
PVC-FIT-LBY050	1/2"	3.10	2.08	100	PVC-FIT-LBY050A
PVC-FIT-LBY075	3/4"	3.60	2.33	120	PVC-FIT-LBY075A
PVC-FIT-LBY100	1"	4.13	2.58	170	PVC-FIT-LBY100A
PVC-FIT-LBY125	1-1/4"	5.04	3.02	250	PVC-FIT-LBY125A
PVC-FIT-LBY150	1-1/2"	5.79	3.46	270	PVC-FIT-LBY150A