




BlackGuard PVC Coated Hubs - STTB

BlackGuard PVC coated STTB style hubs used to terminate conduit runs through the wall of a sheet metal electrical enclosure. They are available with or without grounding lug. STTB style hubs are 'Through-Bulkhead' fittings used to pass conduit runs through firewalls or bulkheads up to 1/8" thick.

Features

- Exterior dark grey PVC coating with a minimum thickness of 40 mil
- Interior Urethane coating with a minimum thickness of 2 mil
- STTB available in 12 trade sizes from 1/2" through 6"
- Sealing sleeves on conduit side of hub
- Molded PVC gasket seals flush with enclosure wall
- Neoprene O-ring gasket provides additional seal
- The length of the sleeve extension(s) shall be at least equivalent to the nominal conduit size for sizes 1/2" - 2". For sizes 2-1/2" - 6", the length of the sleeve extension(s) shall be at least 2".

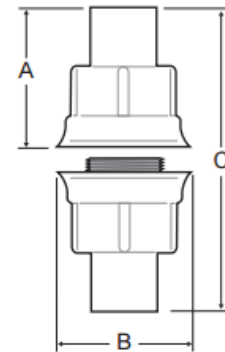

Specifications

- UL Standard 514B
- CSA Standard: C22.2 No. 18

PART NUMBER	SIZE	A	B	C	WEIGHT PER 100 (LBS)
PVC-FIT-STTB050	1/2"	1.84	2.00	3.68	50
PVC-FIT-STTB075	3/4"	2.22	2.25	4.44	50
PVC-FIT-STTB100	1"	2.66	2.50	5.32	70
PVC-FIT-STTB125	1-1/4"	2.94	3.25	5.88	100
PVC-FIT-STTB150	1-1/2"	3.19	3.50	6.38	120
PVC-FIT-STTB200	2"	3.75	4.25	7.50	170
PVC-FIT-STTB250	2-1/2"	4.22	4.75	8.44	250
PVC-FIT-STTB300	3"	4.31	5.25	8.62	300
PVC-FIT-STTB350	3-1/2"	4.38	5.50	8.76	420
PVC-FIT-STTB400	4"	4.44	6.25	8.88	590