




## BlackGuard PVC Coated Aluminum Conduit Special Radius Elbows

### Features

- Exterior dark grey PVC coating with a minimum thickness of 40 mil
- Interior Urethane coating with a minimum thickness of 2 mil
- UL Listed (E215519)
- Manufactured in compliance with UL6A

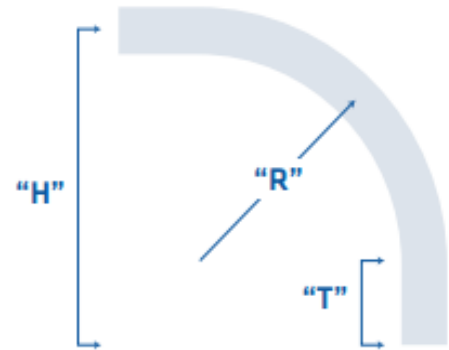

TYPICAL WEIGHT PER ELBOW

Trade Size	RADIUS							
	12"	15"	18"	24"	30"	36"	48"	60"
1/2"	2	2	2	2	3	3	4	4
3/4"	2	2	2	2	3	3	4	4
1"	2	6	6	8	9	10	13	13
1-1/4"	3	7	9	11	12	14	18	18
1-1/2"	3	9	10	13	15	17	21	21
2"	4	12	14	17	20	22	29	29
2-1/2"			21	26	31	35	45	45
3"			28	35	41	46	59	59
3-1/2"			34	42	49	55	71	71
4"			40	49	58	65	84	84
5"								
6"								

RADIUS "R"	TANGENT "T"	OFFSET "H"	UNBENT LENGTH
12"	8"	21"	36"
15"	9"	24"	46"
18"	10"	25"	48"
24"	11"	35"	59"
30"	11"	41"	69"
36"	11"	47"	78"
48"	12"	60"	100"
60"	12"	72"	118"