



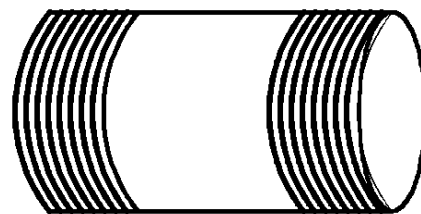

GALVANIZED RIGID CONDUIT NIPPLES

WEIGHT PER 100 PIECES

PIPE SIZE (IN.)	CLOSE LENGTH	LENGTH											
		CLOSE	1-1/2"	2"	2-1/2"	3"	3-1/2"	4"	5"	6"	8"	10"	12"
1/2"	1-1/8"	6	8	12	15	19	22	26	33	40	54	68	82
3/4"	1-3/8"	9	9	14	19	24	28	34	43	52	73	89	109
1"	1-1/2"	16		22	28	36	43	49	64	78	109	138	166
1-1/4"	1-5/8"	22		28	37	47	55	66	84	100	136	176	216
1-1/2"	1-3/4"	28		34	44	56	68	80	103	122	170	216	260
2"	2"	44			59	72	88	103	132	160	220	285	335
2-1/2"	2-1/2"	84				100	120	150	197	240	329	422	505
3"	2-5/8"	118				130	157	200	260	300	411	528	630
3-1/2"	2-3/4"	160						240	320	373	510	655	785
4"	2-7/8"	180						285	380	440	600	775	925
5"	3"	240							480	600	825	1055	1260
6"	3-1/8"	350							660	820	1125	1440	1720



- ❖ NIPPLES MANUFACTURED FROM GALVANIZED RIGID CONDUIT
- ❖ TRADE SIZE 1/2" AND 3/4" HAVE STANDARD 14 NPT THREADS
- ❖ TRADE SIZE 1" THRU 2" HAVE STANDARD 11-1/2 NPT THREADS
- ❖ TRADE SIZE 2-1/2" THRU 6" HAVE STANDARD 8 NPT THREADS

GRC NIPPLES UL LISTED AND BEAR THE UL LABEL, FILE# E100475 (UL6)
NIPPLES MANUFACTURED TO ANSI C80.1-1994 SPECIFICATIONS, FED SPEC'S WW-C-581-D