


## BlackGuard PVC Coated Galvanized Conduit Special Radius Elbows

### Features

- Exterior dark grey PVC coating with a minimum thickness of 40 mil
- Interior Urethane coating with a minimum thickness of 2 mil
- UL Listed (E100475)
- Manufactured in compliance with UL6 and NEMRA RN-1

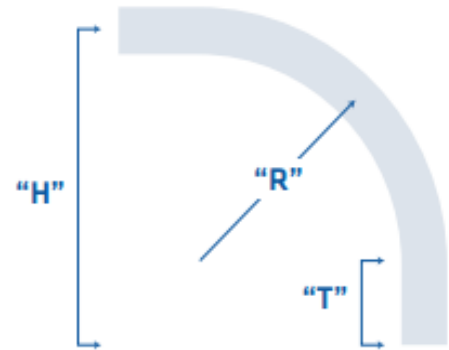

TYPICAL WEIGHT PER ELBOW

Trade Size	RADIUS							
	12"	15"	18"	24"	30"	36"	48"	60"
1/2"	4	6	6	8	9	10	13	15
3/4"	5	7	9	11	12	14	18	20
1"	7	9	10	13	15	17	21	24
1-1/4"	10	12	14	17	20	22	29	33
1-1/2"	17	19	21	26	31	35	45	51
2"	23	25	28	35	41	46	59	67
2-1/2"			34	42	49	55	71	90
3"			40	49	58	65	84	93
3-1/2"					77	87	112	126
4"						120	156	172
5"								
6"								

RADIUS "R"	TANGENT "T"	OFFSET "H"	UNBENT LENGTH
12"	8"	21"	36"
15"	9"	24"	46"
18"	10"	25"	48"
24"	11"	35"	59"
30"	11"	41"	69"
36"	11"	47"	78"
48"	12"	60"	100"
60"	12"	72"	118"