



BlackGuard PVC Coated LBD Style Pulling Elbows


BlackGuard PVC coated LBD Style fittings provide for easy wire pulling in tight radius bends. LBD fittings provide for a seal in the PVC Coating between the fitting and the cover.

Features

- Exterior dark grey PVC coating with a minimum thickness of 40 mil
- Interior Urethane coating with a minimum thickness of 2 mil
- Sizes available are 1/2" through 4"
- The length of the sleeve extension(s) shall be at least equivalent to the nominal conduit size for sizes 1/2" - 2".
For sizes 2-1/2" - 6", the length of the sleeve extension(s) shall be at least 2".
- PVC Seal between fitting and cover

Specifications

- UL Standard 886
- CSA Standard: C22.2 No.18

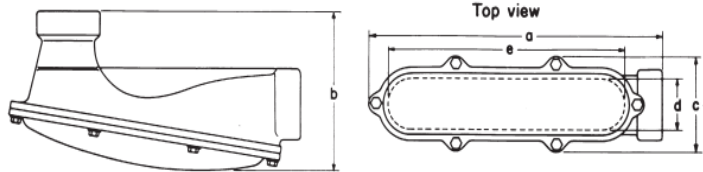

* For 1/2-3/4-1 sizes only
"c" dimension is outside width (no bosses)

PART NUMBER	SIZE	WEIGHT PER 100	ALUMINUM PART NUMBER
PVC-FIT-LBD050	1/2"	120	PVC-FIT-LBD050A
PVC-FIT-LBD075	3/4"	200	PVC-FIT-LBD075A
PVC-FIT-LBD100	1"	250	PVC-FIT-LBD100A
PVC-FIT-LBD125	1-1/4"	600	PVC-FIT-LBD125A
PVC-FIT-LBD150	1-1/2"	1150	PVC-FIT-LBD150A
PVC-FIT-LBD200	2"	1800	PVC-FIT-LBD200A
PVC-FIT-LBD250	2-1/2"	2200	PVC-FIT-LBD250A
PVC-FIT-LBD300	3"	3500	PVC-FIT-LBD300A
PVC-FIT-LBD350	3-1/2"	6000	PVC-FIT-LBD350A
PVC-FIT-LBD400	4"	7000	PVC-FIT-LBD400A